

Area Scan lens


MH2528SP



Features

- Support up to 1/1.8" camera sensors;
- 7 models, focal length covering from 6mm to 50mm;
- High resolution for 3MP camera in full of view , high edge definition ;
- Design for close working distance , more suitable for industrial vision inspection scenarios ;
- Ultra low distortion ;
- Stable sharpness quality when temperature varies from -10°C~50°C ;

Dimensions (mm)

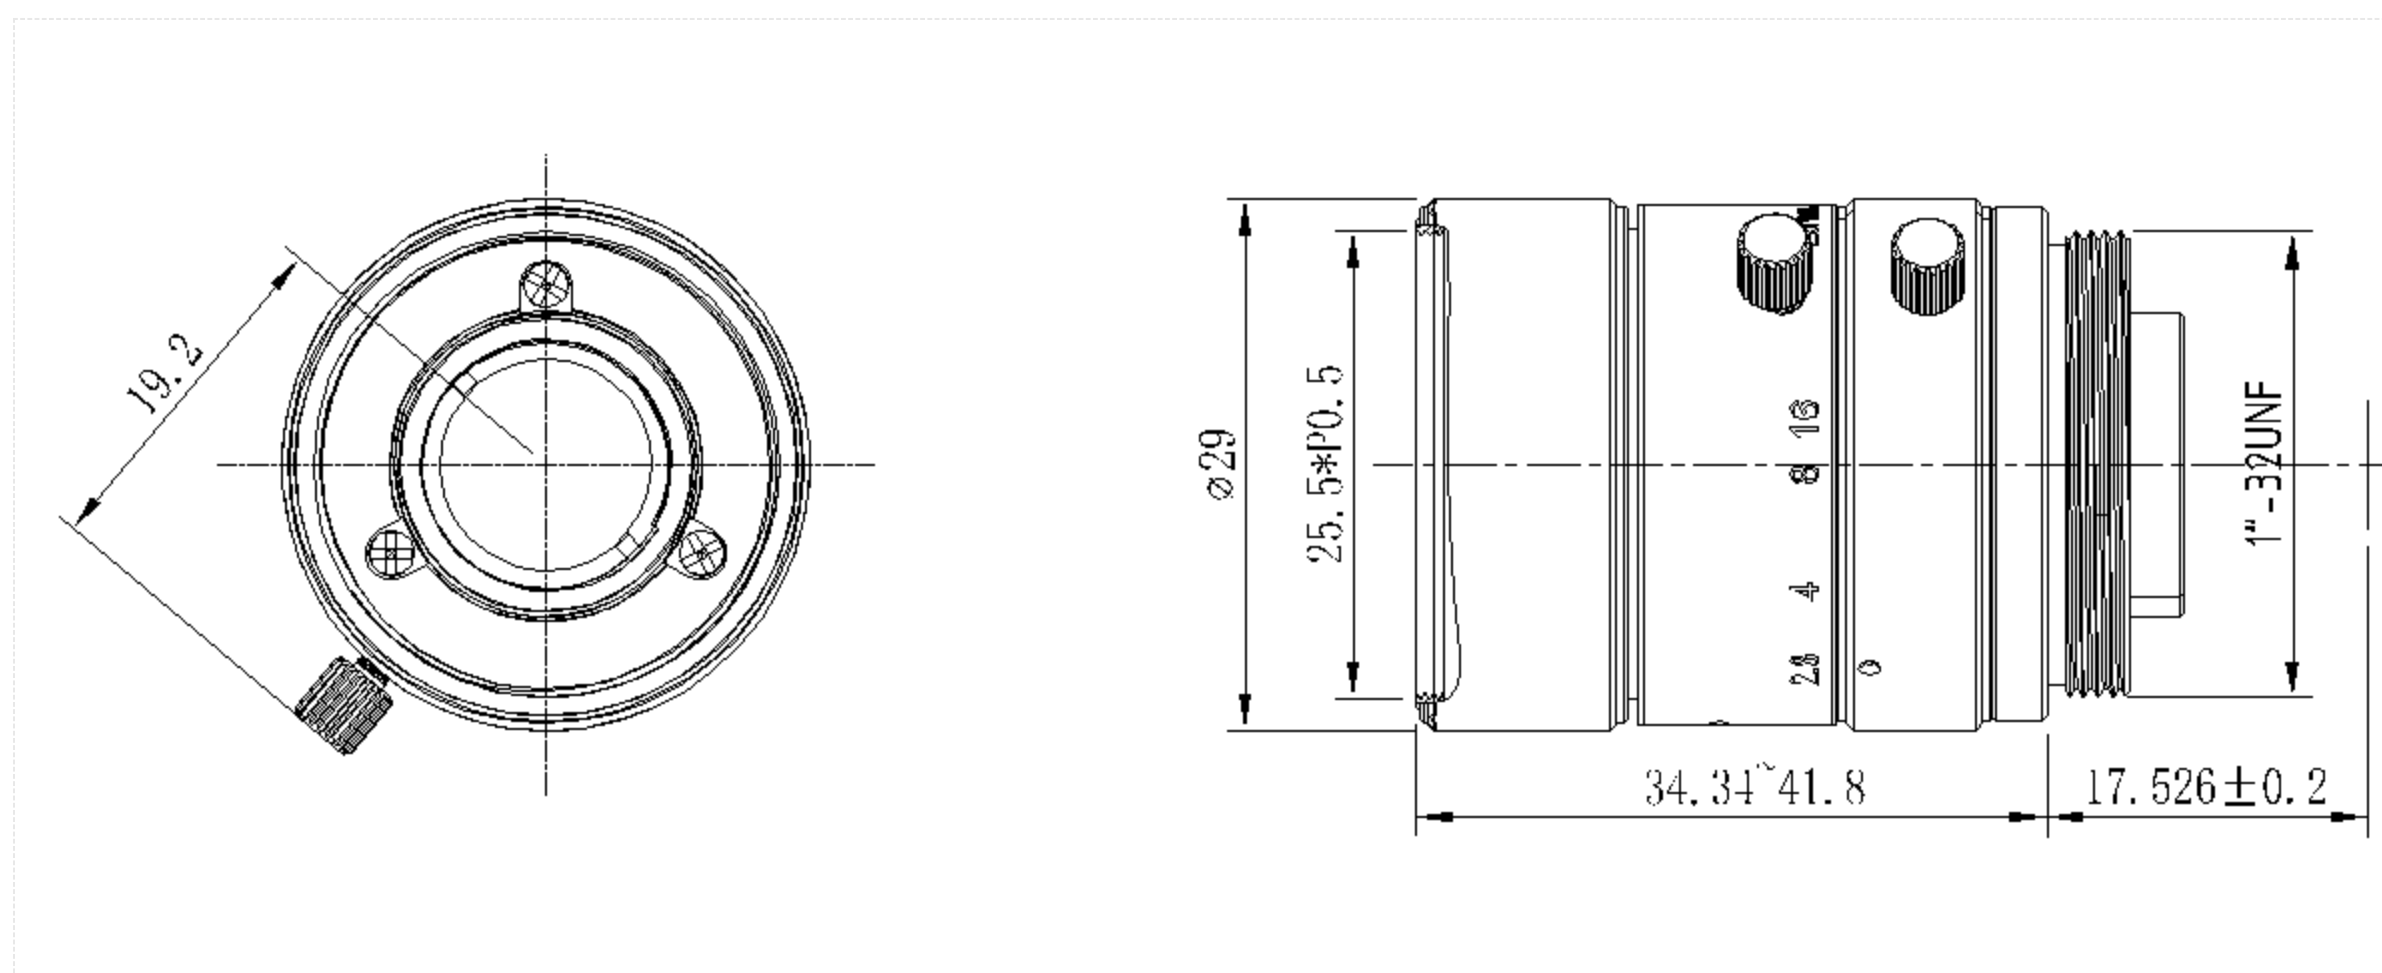

Specification

Model		MH2528SP
Basic	Series	MH-SP Series
	Model	MH2528SP
	Focal Length	25 mm
	Aperture	F2.8 - 16
	Image Sensor Size	Φ9.4 mm(1/1.8")
	Focus Range	0.1 m to infinite
	Optical Distortion	-0.03%
	TV Distortion	-0.02%
	Field of View	19.82°×16.35°×10.96°(9 mm×7.4 mm×5.3 mm)
	Relative Illumination	94% (F2.8); 95% (F4.0)
	CRA (Chief Ray Angle)	5.3°
	Spectral Range	436 nm ~ 656 nm
	Spectral Transmission	T > 85%
Structure	Filter Thread	M25.5×P0.5
	Focus Control	Manual
	Iris Control	Manual
	Product Dimensions	34.34×Φ29 mm
	Net Weight	48.02 g
Environment	Operating Temperature	-10°C ~ +50°C